

# HORIBA

Explore the future

## GLOSS CHECKER IG Series

IG-320  
IG-331

High-precision measurements with an integral light source and detector lets the user gather and view averaged data.

### IG-320



Digital display brings pinpoint accuracy to gloss evaluation.



High-efficiency and flexibility utilizing a separate detector and light source offers the ability to switch between 60 and 20 degree measuring angles.

### IG-331



CE marking compliant

### Specifications

#### IG-331

#### IG-320



<b>Optical system</b>	60° measurement: Incident angle 60° Reception angle 60°  20° measurement: Incident angle 20° Reception angle 20°	Incident angle 60° Reception angle 60°
<b>Measuring area</b>	60° measurement: 3 x 6 mm oval 20° measurement: 3 x 4 mm oval	12 mm x 6 mm oval
<b>Light source</b>	LED (wavelength: 890 nm)	LED (wavelength: 880 nm)
<b>Detector</b>	SPD (silicone photodiode)	SPD (silicone photodiode)
<b>Measuring range</b>	0-100	0-100.0
<b>Display range</b>	0-199 (resolution: 1)	0-199.0 (resolution: 0.1)
<b>Reproducibility</b>	±5% F.S. ±1 digit	±0.5% F.S. ±1 digit
<b>Power source</b>	A3 dry-cell battery x 4 Not rechargeable	S-006P dry battery (9VDC) for operation, CR-2025 lithium battery (3VDC) for memory
<b>Continued use time</b>	50 hours or more	15 hours or more
<b>Ambient conditions</b>	10-40°C	0-40°C
<b>Dimensions</b>	Main body: 140 (W) x 75 (H) x 34 (D) mm 5.5 (W) x 3.0 (H) x 1.3 (D) in  Optical system: 88 (W) x 30 (H) x 45 (H) mm 3.5 (W) x 1.2 (H) x 1.8 (H) in	78 (W) x 189 (H) x 58 (D) mm 3.1 (W) x 7.4 (H) x 2.3 (D) in
<b>Mass</b>	Approx. 350g (with battery)	Approx. 400g (with battery)
<b>Additional Functions</b>	Automatic calibration Automatic power cut-off Display hold Overrange display Battery life display	Automatic calibration Automatic power cut-off Display hold Overrange display Battery alarm Built-in data memory (max. 99) Computation of averages Keystroke confirming tone

Note: Use the 20° measurement mode of the IG-331 when the gloss value in the 60° measurement mode exceeds 70.

Accessory Protective cap (with standard surface for calibration)

#### Australian Distributor



Australian Scientific Pty Ltd  
PO Box 335  
Kotara, NSW 2289  
Tel: 1800 021 083  
Fax: 02 4956 2525  
Email: horiba@austscientific.com.au

#### Award of Certification

ISO 14001 JQA-E-90039 (Head Office/Factory)  
ISO 9001 JQA-0298



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The contents of this catalog are subject to change without prior notice, and without any subsequent liability to this company.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.

# HORIBA

<http://www.horiba.com> e-mail: [info@horiba.co.jp](mailto:info@horiba.co.jp)

#### ● HORIBA, Ltd.

**Head Office**  
Miyano Higashi, Kisshoin  
Minami-ku, Kyoto, Japan  
Phone: 81 (75) 313-8123  
Fax: 81 (75) 321-5725

**Tokyo Sales Office**  
1-7-8 Higashi-Kanda  
Chiyoda-ku, Tokyo, Japan  
Phone: 81 (3) 3861-8231  
Fax: 81 (3) 3861-8259

**Beijing Representative Office**  
Suite 1409, Tower B,  
COFCO Plaza, No. 8,  
Jianguomennei Avenue,  
Beijing, China, 100005  
Phone: 86 10-6522-7573  
Fax: 86 10-6522-7582

**Shanghai Representative Office**  
Unit F1 16F  
Jiushi Fuxing Mansion,  
No. 918, Huaihai Zhong Road,  
Shanghai, China, 200020  
Phone: 86 21-6415-3689/90  
Fax: 86 21-6415-9746

**Taiwan Representative Office**  
No.15 Alley6, Lane 485,  
Sec. 1, Kuang Fu Rd.,  
Hsin-Chu, Taiwan, R.O.C.  
Phone: 886 (3) 5799143  
Fax: 886 (3) 5799164

#### ● HORIBA KOREA Ltd.

112-6 Sogong-Dong  
Choong-ku, Seoul, Korea  
Phone: 82 (2) 753-7911  
Fax: 82 (2) 756-4972

#### ● HORIBA INSTRUMENTS Pte. LTD.

10 Ubi Crescent  
#05-11/12, Ubi Techpark  
Singapore 408564  
Phone: 65 6745-8300  
Fax: 65 6745-8155

#### ● HORIBA INSTRUMENTS INCORPORATED Irvine Facility

17671 Armstrong Avenue  
Irvine, CA 92614, U.S.A.  
Phone: 1 (949) 250-4811  
Fax: 1 (949) 250-0924

#### ● Ann Arbor Facility

5900 Hines Drive  
Ann Arbor, MI 48108  
U.S.A.  
Phone: 1 (734) 213-6555  
Fax: 1 (734) 213-6525

#### ● HORIBA / STEC INCORPORATED

1080 E. Duane, Suite. A  
Sunnyvale, CA 94086  
U.S.A.  
Phone: 1 (408) 730-4772  
Fax: 1 (408) 730-8975

#### ● HORIBA GmbH

Kaplanstrasse 5  
A-3430 Tulln,  
Austria  
Phone: 43 (2272) 65225  
Fax: 43 (2272) 65230

#### ● HORIBA CZECHIA

Organizacni slozka Praha  
Petrohradská 13  
CZ-101 00 Praha 10, Czech Republic  
Phone: 420 (2) 717-464-80  
Fax: 420 (2) 717-470-64

#### ● HORIBA INSTRUMENTS LIMITED

Kyoto Close  
Summerhouse Road  
Moulton Park, Northampton  
NN3 6FL, U.K.  
Phone: 44 (1604) 542500  
Fax: 44 (1604) 542699

#### ● HORIBA EUROPE GmbH Head Office

Hans-Mess-Str.6  
D-61440 Oberursel/Ts.  
Germany  
Phone: 49 (6172) 1396-0  
Fax: 49 (6172) 137385

#### ● Leichlingen Facility

Julius-kronenberg Strasse  
D-42799 Leichlingen  
Germany  
Phone: 49 (2175) 8978-0  
Fax: 49 (2175) 8978-50

#### ● HORIBA FRANCE

Rue L. et A. Lumière  
Technoparc  
F-01630 St-Genis-Pouilly  
France  
Phone: 33 (4) 50-42-27-63  
Fax: 33 (4) 50-42-07-74


#### ● HORIBA SWEDEN

Hertig Carlsvag 55-57  
S-15138 Södertälje  
Sweden  
Phone: 46 (8) 550-80701  
Fax: 46 (8) 550-80567

#### ● HORIBA ITALY

Europalace  
Corso Torino 43/45  
10043 Orbassano, Torino, Italy  
Phone: 39 (011) 9040601  
Fax: 39 (011) 9000448

#### Example of measurement of ceramic tile gloss



The above graph shows the results of measuring ceramic tiles, widely used as the standard surface for the medium-gloss range (secondary standard surface) because of the stability of surface conditions. The IG Series produces extremely precise values.

#### ● What is Glossiness?

Gloss is a quantity that expresses the degree of reflection when light hits a surface. It is determined by comparing the strength of reflected light from the area being measured with that from the standard surface.

*Horiba continues contributing to the preservation of the global environment through analysis and measuring technology.*



# Handy Digital Gloss Checkers Allow Objective, Quantified Gloss Measurements

Designed for greater ease of operation, maintain clean surfaces and improve quality control inspection in various industrial applications.

Guaranteeing uniform production quality and standards for gloss measurement. HORIBA's IG Series Gloss Checkers display gloss measurements as numerical data, eliminating ambiguity and ensuring objective evaluation of a product's quality. Compact in design and ready when powered on, all the user needs to do is hold the portable gloss checker against the surface being evaluated for quality control of paints, polishes, floor maintenance and many other industrial applications.

## High-Efficiency Measurements Enables Easy Switching of Measuring Angles (60° and 20°)

The flexible, remote connection of the probe to the display unit ensures greater work efficiency and safety in all applications.



## High-Precision Measurements Lets Users Gather Data or View Averages with a Single Key Operation

The compact, lightweight design is ideal for production line and outdoor applications.



### IG-331

#### One-Touch Calibration


Just press the calibration key (CAL) to start automatic, sequential zero-span calibration.

#### Selectable Measuring Angle (60° or 20°)

Choose 60° for standard gloss measurements. For high-gloss surfaces with gloss values over 70, simply switch to the 20° measuring angle. The selectable angle feature makes it easy to measure glossy surfaces.



#### ■ Gloss Checker IG-331 Optical System

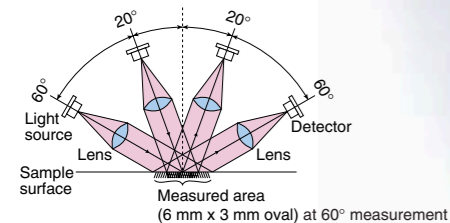


### IG-320

#### High-Precision Measurements with ±0.5% Full-Scale Reproducibility

The combination of the near infrared ray pulse system, virtually unaffected by ambient lights or colors, and HORIBA's proprietary measuring system provides a high-precision gloss checking system compatible with JIS standards.


#### Gather Data or View Averages with a Single Key Operation

Up to 99 measurements can be taken with a simple key operation and averaged using another key. Up to 99 averages can be stored for later use. Easy data management promises smooth inspection work.

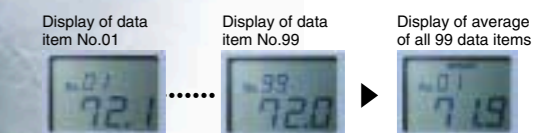

Up to 99 averages (AVERAGE No. 99) can be stored by repeating two simple steps.


#### ■ Gloss Checker IG-320 Optical System

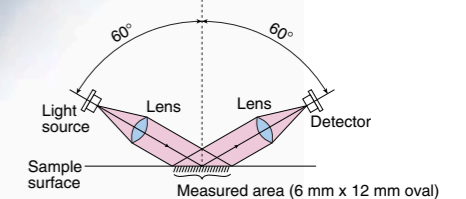

#### Versatile applications

##### ●Quality control of paint and ink

For quality testing, outdoor exposure testing, hue adjustment or luster testing.



##### ●Check and diagnosis of coated surfaces

Check external coating, cleaning or waxing condition of vehicles, shops, aircraft, bridges, iron/steel frames, and structures or prefabricated structures, etc., and diagnosis of deterioration.



##### ●Checking printed matter

Evaluation of embellishing properties in varnishing stage (lamination, endless processing, etc.); evaluation of time-induced change and uniformity of surface after drying process; checking paper surface condition.




##### ●Checking external appearance of plastic molding

For checking external appearance of molded resin products and evaluating weather resistance.



##### ●Checking building and masonry finishes

Inspection of external appearance, completed product test and site finish test in production stage of enamel, sash, floor materials, stone materials, furniture, etc.



##### ●Floor maintenance needs

Inspection of waxed floor finishes in hotels, office buildings and stores.



##### ●Other uses

For checking quality and external appearance of film, tape, rubber, leather, etc.