

High Gloss Meter IG-410



Dual range checker for Gloss and Ultra High Gloss measurement

- **Latest model Gloss Checker now checks Ultra high gloss surface finishes**


The new IG-410 now measures ultra high gloss surfaces such as polished metal. The meter has ten times greater measurement range than the conventional model. Now even mirror finishes can be measured too.

- **Compact, lightweight and detachable probe design**

Weighing in at only 350g (1.3lbs), this battery operated instrument is designed to be portable. Fast and reliable measurement by simple one-touch operation. LED light sources give <100,000 hours service so there is no need to exchange these parts due to lifetime.

- **Dual range extends measurement resolution in the low gloss range**

The IG-410 has two user-selectable measurement ranges, depending on the sample to be measured. Low gloss samples can be measured using the 0-100 range and high gloss samples can be measured using the 0-1000 range. Two calibration plates are provided to allow the user to follow a simple one-touch calibration procedure to ensure reproducible results.




Specification

Measuring system	60°
Measuring area	3×6mm oval
Light source (Service life)	LED<890nm> (Indefinite)
Detector	SPD<890nm> (Silicon photodiode)
Measuring range (resolution)	range1 : 0.0~100.0 (0.1) range2 : 0~1000 (1)
Repeatability	±1% F.S.
Power source (Battery life)	R6(AA) Alkaline × 4 (200 hours or more at continuous operation)
Ambient temperature range	10-40°C
Dimensions	Main body : 75(W)×34(D)×140(H) mm 5.5(W)×3.0(D)×1.3(H) in Optical system : 88(W)×30(D)×45(H) mm 3.5(W)×1.2(D)×1.8(H) in
Mass	Approx. 350g (including battery)
Additional functions	Automatic calibration Automatic power cut-off Overrange display Display hold
Accessories	Standard plate for range 100, 1000


A measurement standard for the gloss value

Gloss value 100 is defined as specular reflectance in incident angle θ of the glass of reflectance index 1.567. With incident angle $\theta = 60^\circ$, specular reflectance is 10%, or gloss value 100. Consequently gloss in specular reflectance 100% is calculated as 1000. Reflectance in many polished metals is 50% or more, some are 90% or more. Then measurement range is expanded up to 1000 in IG-410.


※I adopt IR LED (an HORIBA original method) in a source of light.

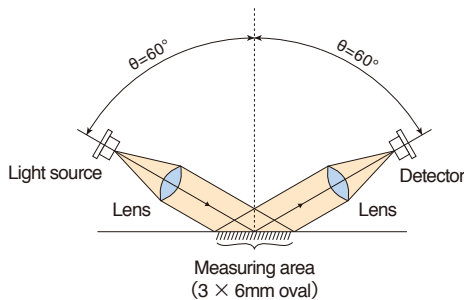


Application

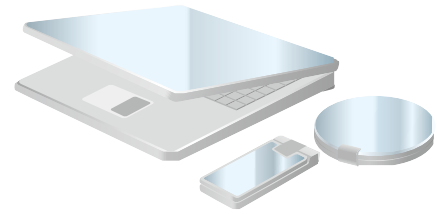

For external confirmation of plating product.



For finish confirmation of rolling metals.



For Research and Development of wafer polishing devices.

Award of Certification

ISO 14001 JQA-E-90039 (Head Office/Factory)
ISO 9001 JQA-0298

Horiba continues contributing to the preservation of the global environment through analysis and measuring technology.



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The contents of this catalog are subject to change without prior notice, and without any subsequent liability to this company.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

<http://www.horiba.com> e-mail: info@horiba.co.jp

● HORIBA, Ltd.

Head Office
Miyahogashi, Kisshoin
Minami-ku, Kyoto, Japan
Phone: 81 (75) 313-8123
Fax: 81 (75) 321-5725

Tokyo Sales Office
1-7-8 Higashi-Kanda
Chiyoda-ku, Tokyo, Japan
Phone: 81 (3) 3861-8231
Fax: 81 (3) 3861-8259

TAIWAN Representative Office
3F, NO.18 Lane 676, Chung
Hua Rd, Chupei City,
Hsinchu Hsien, 302, Taiwan
Phone: 886 (3) 656-1012
Fax: 886 (3) 656-8231

● HORIBA TRADING (SHANGHAI) CO., Ltd.

Shanghai Office
Room 1103, United Plaza,
1468 Nanjing Rd. West,
Shanghai, 200040, China
Phone: 21-3222-1818
Fax: 21-6289-5553

Beijing Office
Room 609, Jin Bao Plaza,
89 Jin Bao Street,
Dongcheng District, Beijing,
100005 China
Phone: 10-6522-7573
Fax: 10-6522-7582

● HORIBA KOREA Ltd.

112-6 Sogong-Dong
Choong-ku, Seoul, Korea
Phone: 82 (2) 753-7911
Fax: 82 (2) 756-4972

● HORIBA INSTRUMENTS Pte. LTD.

10 Ubi Crescent
#05-11/12, Ubi Techpark
Singapore 408564
Phone: 65 6745-8300
Fax: 65 6745-8155

● HORIBA INSTRUMENTS INCORPORATED

Irvine Facility
17671 Armstrong Avenue
Irvine, CA 92614, U.S.A.
Phone: 1 (949) 250-4811
Fax: 1 (949) 250-0924

Ann Arbor Facility
5900 Hines Drive
Ann Arbor, MI 48108
U.S.A.
Phone: 1 (734) 213-6555
Fax: 1 (734) 213-6525

● HORIBA / STEC INCORPORATED

1080 E. Duane, Suite. A
Sunnyvale, CA 94086
U.S.A.
Phone: 1 (408) 730-4772
Fax: 1 (408) 730-8975

● HORIBA GmbH

Kaplanstrasse 5
A-3430 Tulln,
Austria
Phone: 43 (2272) 65225
Fax: 43 (2272) 65230

● HORIBA CZECHIA

Organizacni slozka Praha
Petrohradská 13
CZ-101 00 Praha 10, Czech Republic
Phone: 420 (2) 717-464-80
Fax: 420 (2) 717-470-64

● HORIBA INSTRUMENTS LIMITED

Kyoto Close
Summerhouse Road
Moulton Park, Northampton
NN3 6FL, U.K.
Phone: 44 (1604) 542500
Fax: 44 (1604) 542699

● HORIBA EUROPE GmbH

Head Office
Hans-Mess-Str.6
D-61440 Oberursel/Ts.
Germany
Phone: 49 (6172) 1396-0
Fax: 49 (6172) 137385

Leichlingen Facility
Julius-kronenberg Strasse
D-42799 Leichlingen
Germany
Phone: 49 (2175) 8978-0
Fax: 49 (2175) 8978-50

● HORIBA FRANCE

12, Avenue des Tropiques
91955 LES ULIS
France
Phone: 33 (1) 69-29-96-23
Fax: 33 (1) 69-29-95-77

● HORIBA SWEDEN

Sydhamnsvägen 55-57,
SE-151 38 Södertälje,
Sweden
Phone: 46 (8) 550-80701
Fax: 46 (8) 550-80567

● HORIBA ITALY

Europalace
Corso Torino 43/45
10043 Orbassano, Torino, Italy
Phone: 39 (011) 9040601
Fax: 39 (011) 9000448

Bulletin:HRE-3313A

Printed in Japan ZR-TF(SK)33